




garland

Security Cable

Part No: MC74-W

Description	Stranded 24AWG PACW, 4 Cores, PVC Insulation, PVC Sheath.
Applicable Standards	AS/CA S-008, BS4737-3.30, AS 1049
Suitable Applications	For inter-connecting wiring, suitable for use in Security/Intruded Alarm system; Use in low voltage/low current applications such as intercommunication.
	Not suitable for mains connection.


Cable Construction Drawing

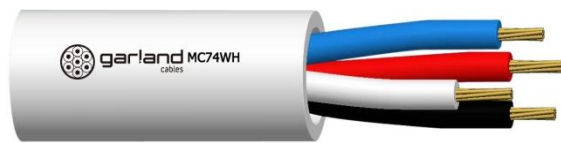

Picture is for illustration only.
For actual jacket colours, please refer to Packing Table.



Cable Construction Relative Parts



Cable Description			
Conductor	No. of Strands	Strand Size	Material
	7	0.2mm	PACW
Insulation	Cores:	4	
	Material:	V-75 PVC	
	Colour:	White, Blue, Red, Black.	
	Nominal Diameter:	1.1 mm	
	Nominal Thickness:	0.3 mm	

With Garland, you are always well connected.

Sales Enquiries 1800 66 99 99
www.garlandcables.com.au

MC74-W-150311.docx

made by



madison



garland

Sheath	Material:	4V-75 PVC
	Colour:	Refer to Packing Table
	Diameter:	3.7 mm
	Average Thickness:	0.4 mm

Electrical Properties

Voltage Rating	ELV
----------------	-----

Mechanical Properties

Operating Temperature Range	-15 to 75°C
Max. Recommended Pulling Tension	61N
Min. Bend Radius (install)	40 mm
Approximate Mass	1.86 kg/100m

Packing Table

SKU	Jacket Colour	Length (Metres)	Pack Type	Boxes x Reels per Pallet
MC74WH100W	White	100	Plastic Reel	36 x 8
MC74WH300BW	White	300	Pull Box	45 or 36

- Madison reserves the right to make changes to the products described in this specification without prior notice
- All values subject to factory tolerances

With Garland, you are always well connected.

Sales Enquiries **1800 66 99 99**
www.garlandcables.com.au

MC74-W-150311.docx

