



## 2 WIRE NON-POLARITY VIDEOPHONE MONITOR

# KCV-D372

- 7" Color digital LCD monitor
- Easy to operate using OSD menu and icon button
- Communication between Door camera and Multi entry video panel
- Connection up to 1 Door camera and 2 Monitors

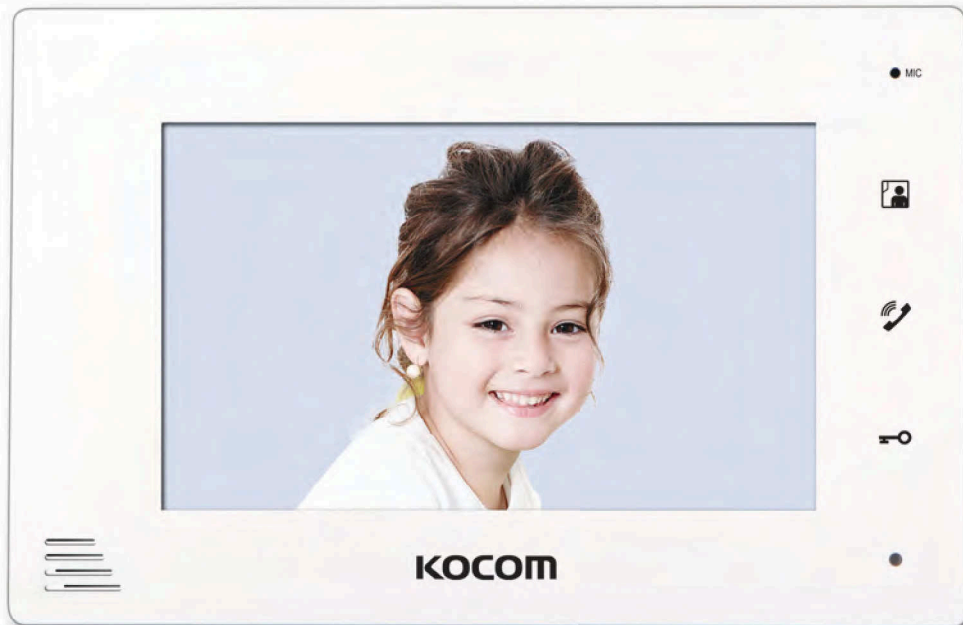

### COLOR



WHITE




BLACK

### SPECIFICATIONS


Model No.	KCV-D372
Power Source	DC 12V±3V
Power Consumption	1.2W(±20%)(Stand by), 8W(±20%)(In load)
Operating Temperature	0°C ~ +40°C
LCD	7" Digital LCD
Communication	Hands-free Type
Wiring	Door camera : Non-polarized 2 wire Ex_Monitor : Polarized 2 wire
Mount Type	Surface mount
Dimesion	222(W) x 144(H) x 26(D) mm

## WIRING DIAGRAM

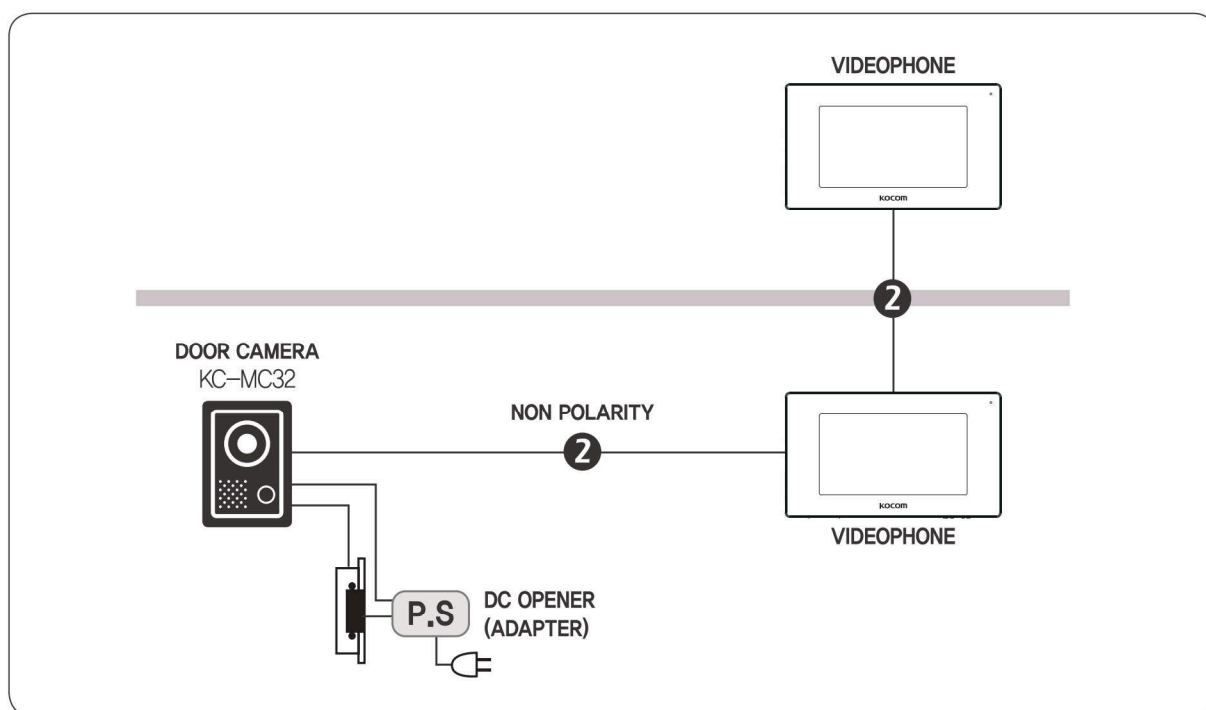

## PRODUCT DIMENSION

(Unit: mm)

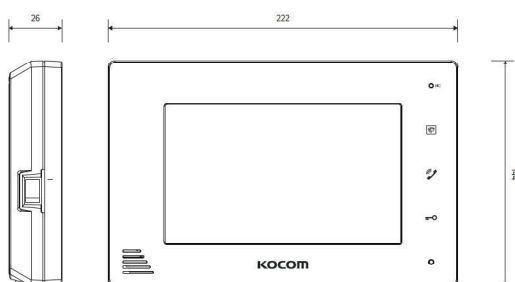

## CONNECTABLE PRODUCT



DOOR CAMERA  
KC-MC32



DOOR CAMERA  
KC-MC22



DOOR CAMERA  
KC-MC11



DOOR CAMERA  
KC-C62



MULTI PANEL  
KVL-C20X

DOOR CAMERA  
**KC-MC32**


- 2 WIRE
- SUNVISOR



**SPECIFICATIONS**

Power	DC 12V±1V(power from monitor)
Power Consumption	Max. 3W
Wiring	2 Wire
Body Material	Metal
Mount Type	Surface mount
Camera Angle	100 ° (Angle Abjustable)
Min. Illumination	0.1 lux(LED ON)
Dimesion	110(W) x 158(H) x 39(D)mm

**WIRING**

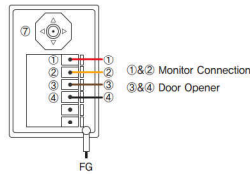

DOOR CAMERA  
**KC-MC22**


- 2 WIRE



**SPECIFICATIONS**

Power	DC 12V±1V(power from monitor)
Power Consumption	Max. 2.5W
Wiring	2 Wire
Body Material	Metal
Mount Type	Surface mount
Camera Angle	90 ° (Fixed)
Min. Illumination	0.1 lux on the object(LED ON)
Dimesion	95(W) x 127(H) x 32(D)mm

**WIRING**

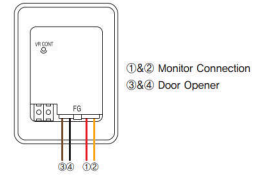

DOOR CAMERA  
**KC-MC11**


- 2 WIRE
- SUNVISOR



**SPECIFICATIONS**

Power	DC 12V±1V(power from monitor)
Power Consumption	Max. 2.5W
Wiring	2 Wire
Body Material	Metal
Mount Type	Surface mount
Camera Angle	90 ° (Fixed)
Min. Illumination	0.1 lux on the object(LED ON)
Dimesion	40(W) x 120(H) x 22(D)mm

**WIRING**



DOOR CAMERA  
**KC-C62**

- 2 WIRE



**SPECIFICATIONS**

Power	DC 12V±1V(power from monitor)
Power Consumption	Max. 2.5W
Wiring	2 Wire
Body Material	Plastic
Mount Type	Surface mount
Camera Angle	100 ° (Fixed)
Min. Illumination	0.1 lux(LED ON)
Dimesion	95(W) x 127(H) x 34(D)mm

**WIRING**

