




SPECIFICATIONS

Model	SL-350QFR	SL-350QNR
Maximum detection range	100 m/350 ft.	
Maximum arrival distance	1000 m/3500 ft.	
Detection method	Quad infrared beam interruption detection	
Selectable beam frequency	4 channels	
Interruption time	Variable between 50/100/250/500 ms (4 steps)	
Power source	Recommend: 3.6 V, 13.0Ah LSH20 lithium batteries manufactured by SAFT	
	Operating range: 3.2 V - 4.0 V lithium batteries Transmitter: 2 or 4 units, Receiver: 2 or 4 units	
Current draw	745µA	
	Transmitter: 420 µA + Receiver: 325 µA (at 25°C, 3.6 VDC)	
Battery life **	Transmitter: Approx. 4 years Receiver: Approx. 5 years	
	Alarm output Form C-Solid State Switch: 3.6 VDC, 0.01 A	
Output	Alarm period 2 sec (±1) (Nominal)	
	D.Q output Form C-Solid State Switch: 3.6 VDC, 0.01 A (Receiver only)	
	Low battery output N.C. (mechanical switch): 3.6 VDC, 0.01 A	
	Tamper output (cover, back box, main unit) N.C. (contact output): 3.6 VDC, 0.01 A Opens when cover, main unit or back box is removed.	
	Indicator Alarm indicator (Receiver) Alarm: ON Light receiving: OFF	
Indicator	Level indicator (Receiver) Not Light receiving: OFF Light receiving: Flickering or OFF	
	Power indicator (Transmitter) Power ON: ON Power OFF: OFF	
	Low battery indicator Voltage reduction: Flickering	
Operating temperature	-20°C - +60°C (-40°F - 140°F)	
Operating humidity	95 % (max.)	
Alignment angle	±90° Horizontal, ±10° Vertical	
Dimension	H x W x D mm(inch): 452 (17.9) x 83 (3.3) x 138 (5.4)	
	Weight 3300 g (Total weight of Transmitter + Receiver, excluding accessories)	
International protection	IP65	

Specifications and design are subject to change without prior notice.
* The value is based on the condition that it is used within the ambient temperature range of 20 to 25°C. (LSH-20 x2 pcs)
** Using batteries other than those recommended may shorten the battery life.

DIMENSIONS

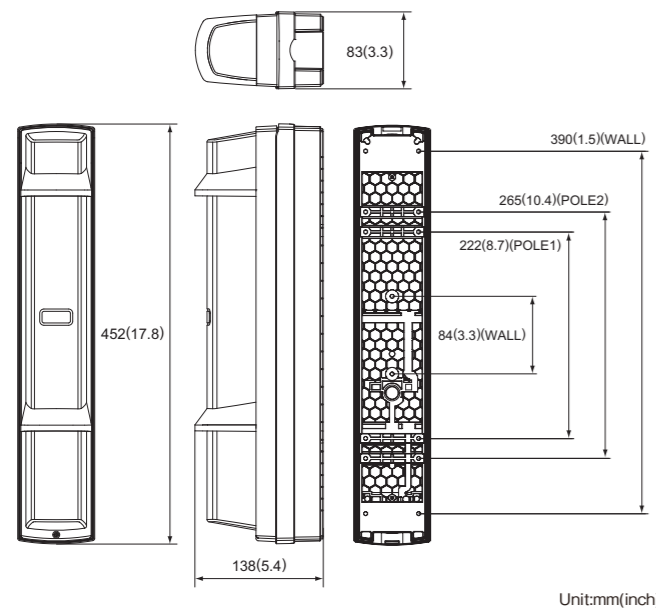

OPTIONS

Anti Bird Cap ABC-4

Keep birds and small animals off the detector to reduce false alarms. Stop rain and snow streaming in front of the detector to keep the sensitivity.



Back Cover BC-4

Conceal the back side of pole mounted detector.



Pole Side Cover PSC-4

Conceal the gap between detectors mounted back to back.




Beam Alignment Unit BAU-4

Align optical axis automatically. (receiver only)



Extension Cable with Connector EC-4

Extension cables between the back box and the main unit when installing to the beam tower.

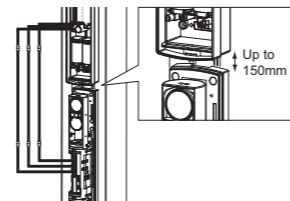

Cable length: 500 mm (19.7 inch)

SHORT RANGE MODELS

Battery operated photoelectric detector



AX-100TFR 30m / 100ft.
AX-200TFR 60m / 200ft.

**Work Smart,
"ENJOY WIRELESS"**


- **LONG DISTANCE : 100m / 350ft. -**
- **LONG BATTERY LIFE : 4 to 10 years -**
- **LONG TERM DURABILITY : IP65 -**

BATTERY OPERATED PHOTOELECTRIC DETECTOR

Smart Line™ series
SL-350 QFR
4ch. beam frequencies selectable model
SL-350 QNR
Standard model




OPTEX CO., LTD. (ISO 9001 Certified / ISO14001 Certified)
5-8-12 Ogino, Otsu, Shiga, 520-0101 Japan
TEL +81(0)77 579 8670 FAX +81(0)77 579 8190
OPTEX INCORPORATED (USA) <http://www.optexamerica.com/>
OPTEX (EUROPE) LTD. (UK) <http://www.optex-europe.com/>
(ISO9001 Certified)
OPTEX SECURITY SAS (FRANCE) <http://www.optex-security.com/>
OPTEX KOREA CO., LTD. (KOREA) <http://www.optexkorea.com/>
OPTEX SECURITY Sp. z o.o. (POLAND) <http://www.optex.com.pl/>
OPTEX (DONGGUAN) CO., LTD. <http://www.optexchina.com/>
SHANGHAI OFFICE (CHINA)

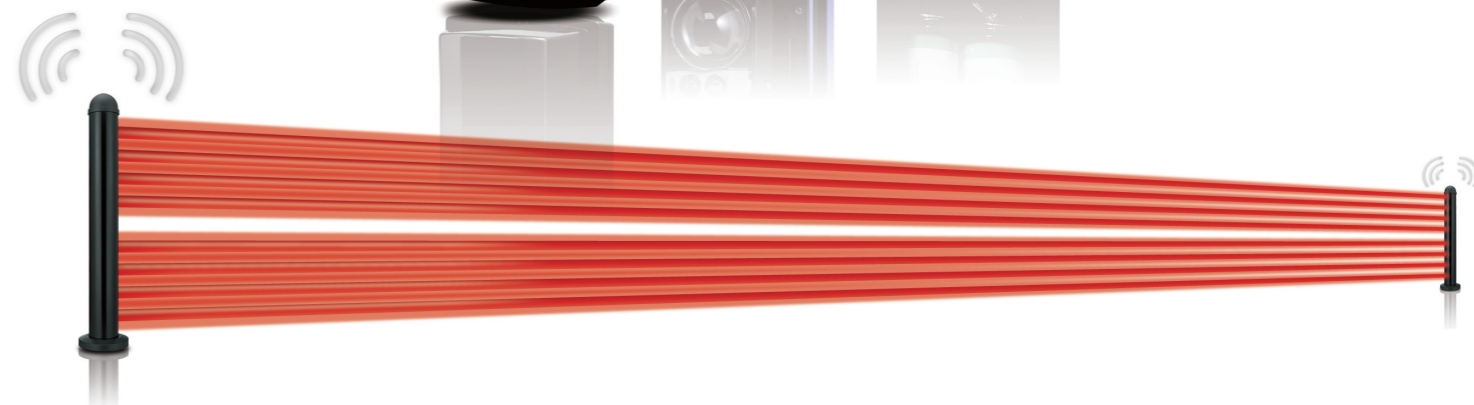


Revolution in the perimeter security industry.

Optex offers a less expensive and more efficient solution with SL-350QFR/SL-350QNR. Typical perimeter systems require expensive trenching or much time for installation. Expensive wire conduit runs and concrete work is unnecessary, allowing installers to save time and money.

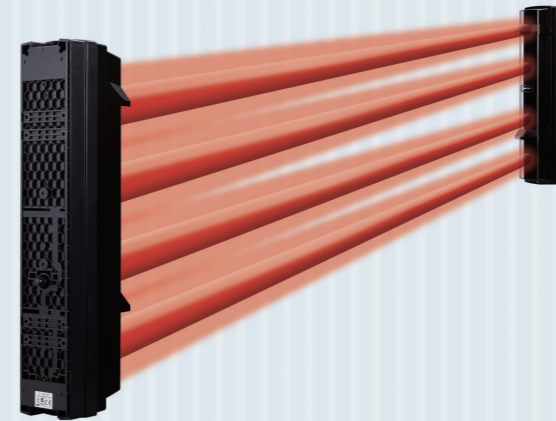

Advantage of wireless system

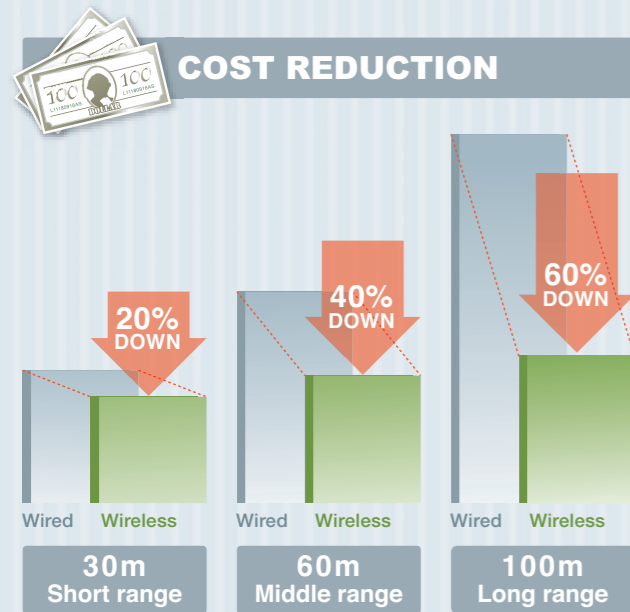


- 1 Low installation costs
- 2 Quick & easy installation
- 3 Flexible location
- 4 Wireless stylish design
- 5 Free from lightning damage

SAVE TIME



Various mounting patterns

Please see the last page for more information on the optimal products.

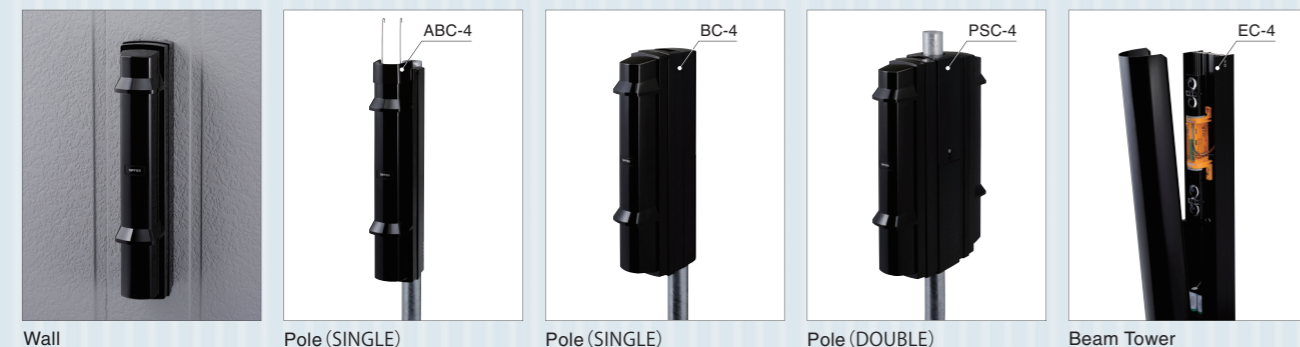

LONG BATTERY LIFE

Approx. 4 years Max. 10 years

Low current consumption
 Transmitter 420µA (0.42mA)
 Receiver 325µA (0.325mA)

When using LSH (3.6V, 13Ah) batteries manufactured by SAFT.



	Transmitter	Receiver
4 pcs	Approx. 8 years	Approx. 10 years
2 pcs	Approx. 4 years	Approx. 5 years


WIRELESS-READY

The SL-350QFR and SL-350QNR, our wireless ready, battery operated photoelectric detectors are designed to work with most manufacturer's wireless transmitters, and the back box has enough space to accommodate them. They are easy deployable and adaptable to any control systems currently installed.



Sniper viewfinder Patent pending

False alarms would be reduced if we can make perfect alignment at the first step. This new telescopic lens has a high level of visibility for optical alignment work. Even when it is the long distance, it can make perfect installation in short period and ensure stable performance. The actual performance of product is highly dependent on not only product quality but also installation quality.

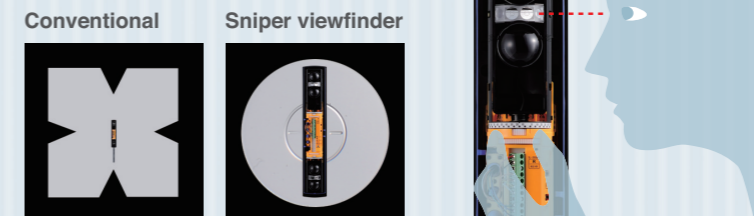


Weather protection IP65



Smart line series are protected from interruption caused by insects, dirt sander or humidity.

Spacious back box

The following figure shows the dimensions of the wireless transmitter installation space in the back box. Note that transmitter with greater dimensions are not applicable.

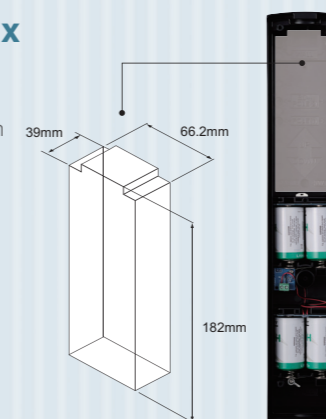

Basic performance

- 99% beam blocking stability
- 4 selectable beam frequencies (SL-350QFR only)
- Beam interruption adjustment function
- Triple tamper function (front cover, back box and wall)
- D.Q.circuit (environmental disqualification)
- High grade aspherical lens
- Form C(N.C./N.O.) output
- Battery saving function
- Intermittent output function
- A.G.C.(Automatic Gain Control) circuit



Specifications OPXBCU-5

The OPXBCU-5 is shares power source and low battery signals between the main unit and the wireless transmitter for OPXSL-350QFR/350QNR Series and OPXAX-100TFR/200TFR Series.

- Input voltage: 3.2 - 4.0 VDC
- Low battery input (EX +/-): N.C. input only
- Current draw: Approx. 5 μ A at 3.6 VDC (no load)
- Output voltage: Normal : Approx. 3.0 - 3.6 VDC
- Low battery : Approx. 2.0 - 2.6 VDC
- Output current: 100 mA (max)
- Operating temperature: -20°C - +60°C (-4°F - +140°F)
- Operating humidity: 95% (max)

The OPXBCU-5 is compatible for the following models series:

- OPXAX-100TFR, OPXAX-100TFRD, OPXAX-100TFR-BYOTX
- OPXAX-200TFR, OPXAX-200TFRD, OPXAX-200TFR-BYOTX
- OPXSL-350QFR, OPXSL-350QFRD, OPXSL-350QFR-BYOTX
- OPXSL-350QNR, OPXSL-350QNRD, OPXSL-350QNR-BYOTX



LSH 20

Primary Li-SOCl₂ cell

High power density 3.6 V D-size spiral cell

Saft's LSH 20 cell is ideally suited for long-term applications (typically from 5 to 20+ years), featuring high drain / high pulses currents.

Benefits

- High power / high energy densities (65 W/kg and 468 Wh/kg)
- High voltage response, stable during most of the lifetime of the application
- Wide operating temperature range (-60°C / +85°C)
- Low self-discharge rate, compatible with long operating life (less than 3% per year of storage, at +20°C, after 1 year)
- Superior resistance to corrosion
- Low magnetic signature

Key features

- Spiral construction
- Built-in safety vent
- Finishing top with 5 A fuse
- Hermetic construction with glass-to-metal seal
- Stainless steel can
- Non-flammable electrolyte
- RoHS and REACH compliance
- Made in France

Designed to meet all major quality, safety and environment standards

- Safety: UL 1642, IEC 60086-4
- Transport: UN 3090 and UN 3091
- Quality: ISO 9001, Saft Excellence System, continuous program

Typical applications

- Utility Metering
- Tracking systems
- Dataloggers
- Alarms and security
- Wireless sensors
- Military radios

NATO Stock Number
6135 14 440 1213



Electrical characteristics¹

Nominal capacity (under 14 mA, +20°C, 2.0 V cut-off) ³	13 Ah
Open circuit voltage (at +20°C)	3.67 V
Nominal voltage (at 2 mA, +20°C)	3.6 V
Nominal energy	47 Wh
Pulse capability ⁴	Up to 4 A
Maximum recommended continuous current	1.8 A
For battery sizing, consult Saft	

Operating conditions

Operating temperature range ⁵	-60°C / +85°C (-76°C / +185°F)
Storage temperatures (max recommended) ⁶	+30°C (+86°F)

Physical characteristics²

Diameter (max)	33.26 mm (1.31 in)
Height (max)	61.31 mm (2.41 in)
Typical weight	100 g (3.5 oz)
Li metal content	approx. 3.8 g

Termination suffix

CN, CNR	Radial tabs
2 PF, 3 PF, 3 PF RP, 4 PF	Radial pins
CNA	Axial leads
FL	Flying leads

Other configurations upon request

¹Typical values relative to cells stored up to one year at +30°C max.

²Sleeved cell.

³Dependent upon current drain, temperature, cut-off and cell orientation.


⁴Under 4 A / 0.1 second pulses, drained every 2 minutes at +20°C from undischarged cells during 24 h, with 10 µA base current, yield voltage readings above 3.0 V after initial stabilisation. The readings may vary according to the pulse characteristics, the temperature, and the cell's previous history. Fitting the cell with a capacitor may be recommended in severe conditions or for high pulse currents. Consult Saft.

⁵Operation above ambient temperature may lead to reduced capacity and lower voltage readings. Consult Saft.

⁶For more severe conditions, consult Saft.


LSH 20

Primary Li-SOCl₂ cell

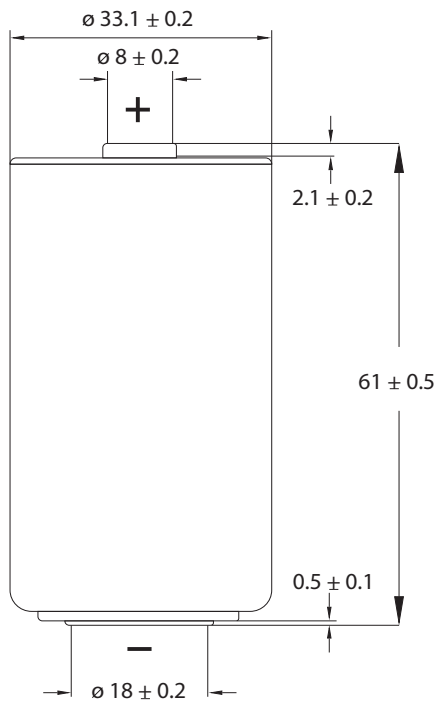


Dimensions in mm


Typical discharge profiles at +20°C

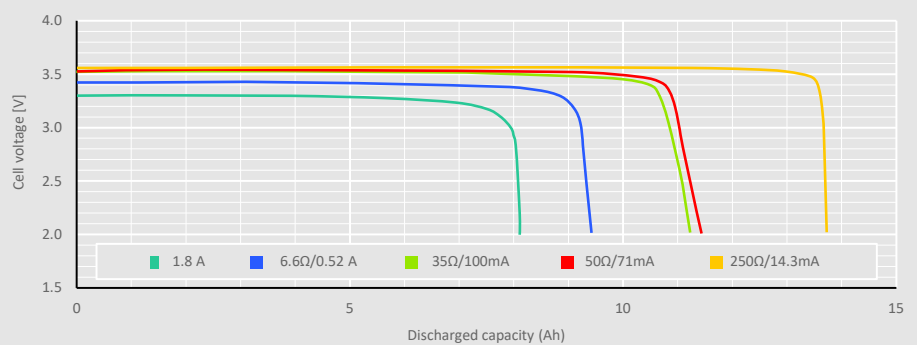

Voltage plateau versus current and temperature (at mid-discharge)

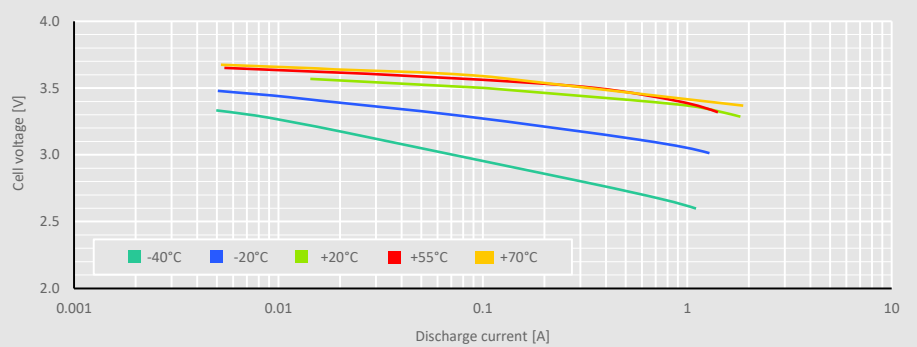

Capacity vs. current at various temperatures

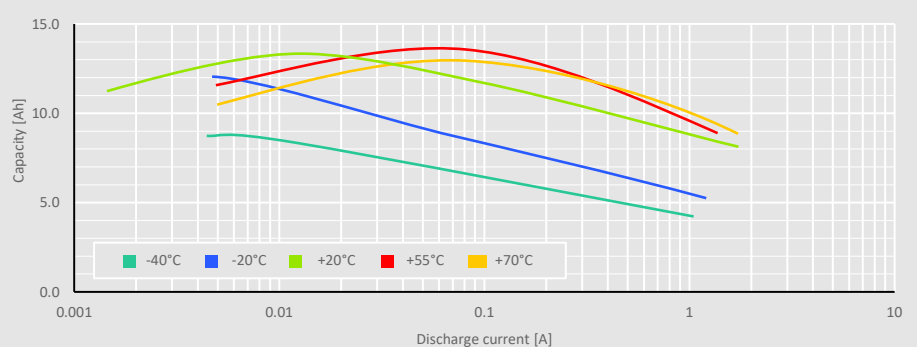

Storage

- The storage area should be clean, cool (preferably not exceeding +30°C), dry and ventilated.

Warning

- Fire, explosion and severe burn hazard.
- Do not recharge, short circuit, crush, disassemble, heat above 100°C (212°F), incinerate, or expose contents to water.
- Do not solder directly to the cell (use tabbed cell versions instead).
- Do not remove the cells from their original packing before use.
- Do not store the cells in bulk to avoid accidental short circuiting.
- Do not mix new and used cells or cells from different origins.
- Mind the polarities of the cell.

26, quai Charles Pasqua
92300 Levallois-Perret - France
www.saft.com

Saft, a subsidiary of TotalEnergies
S.A.S. au capital de 26 724 876 €
R.C.S. Nanterre 481 480 465

Document N° 31015-2-0923

Edition: September 2023

Data in this document is subject to change without notice and becomes contractual only after written confirmation.

Photo credits: © Saft